


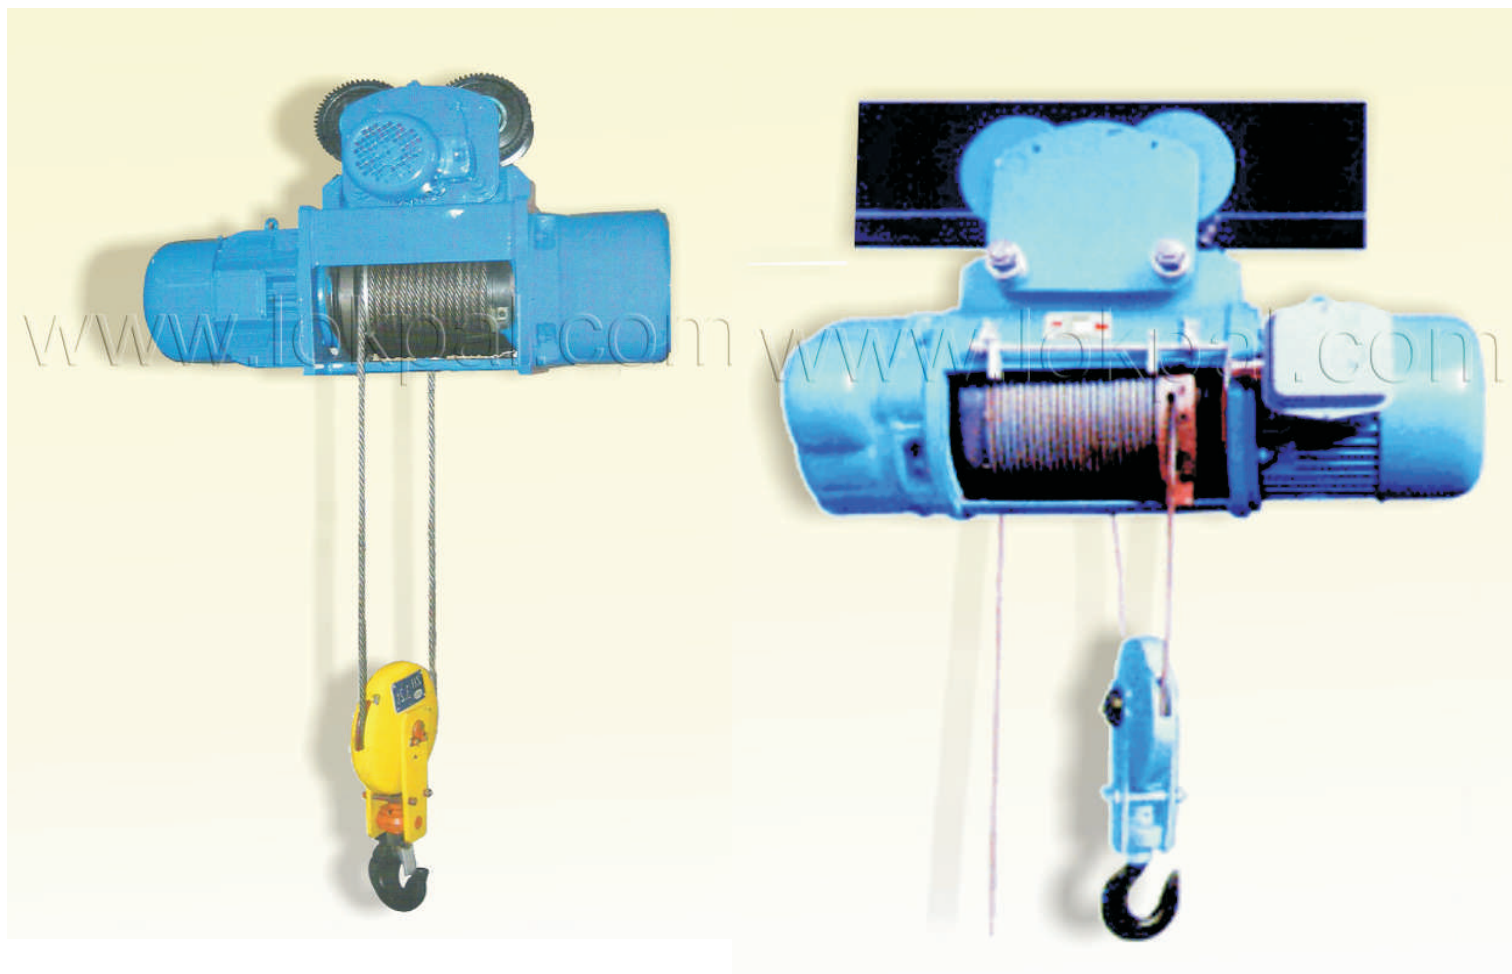

Features

Compact and high efficient electric motor. Electricity consumption is less. Hoist body. Press steel s structure high strength body, light and compact design. Both the top and bottom hooks are made of high tensile alloy steel with special heat treatment. This ensure extra safety and prevent hook from breaking down.

Specifications :

Model	Capacity	Lifting Height	Lifting Speed	Travel Speed	Wire Rope Dia.	Wire Rope Construction	Min. Radius of Beam	Lifting Motor 3 ph.	Traveling Motor 9 ph.
CD1	Tons	mtrs	mtr/min	mtr/min	nm		mtr	kw	kw
	0.5	9	8.0	20	5.1	6x19	1.5	0.8	0.2
	1	9	8.0	20	7.4	6x37	1.5	1.5	0.2
	2	9	8.0	20	11	6x37	2	3	0.2
	3	9	8.0	20	13	6x37	2	4.5	0.2
	5	9	8.0	20	14	6x37	2.5	7.5	0.5
	8	9	7.0	20	13	6x37	3	7.5	2x0.5
	10	9	7.0	20	14	6x37	3.5	13	2x0.5
	12	9	5.0	20	16	6x37	3.5	13	2x0.8

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com