


ELECTRIC CHAIN HOIST

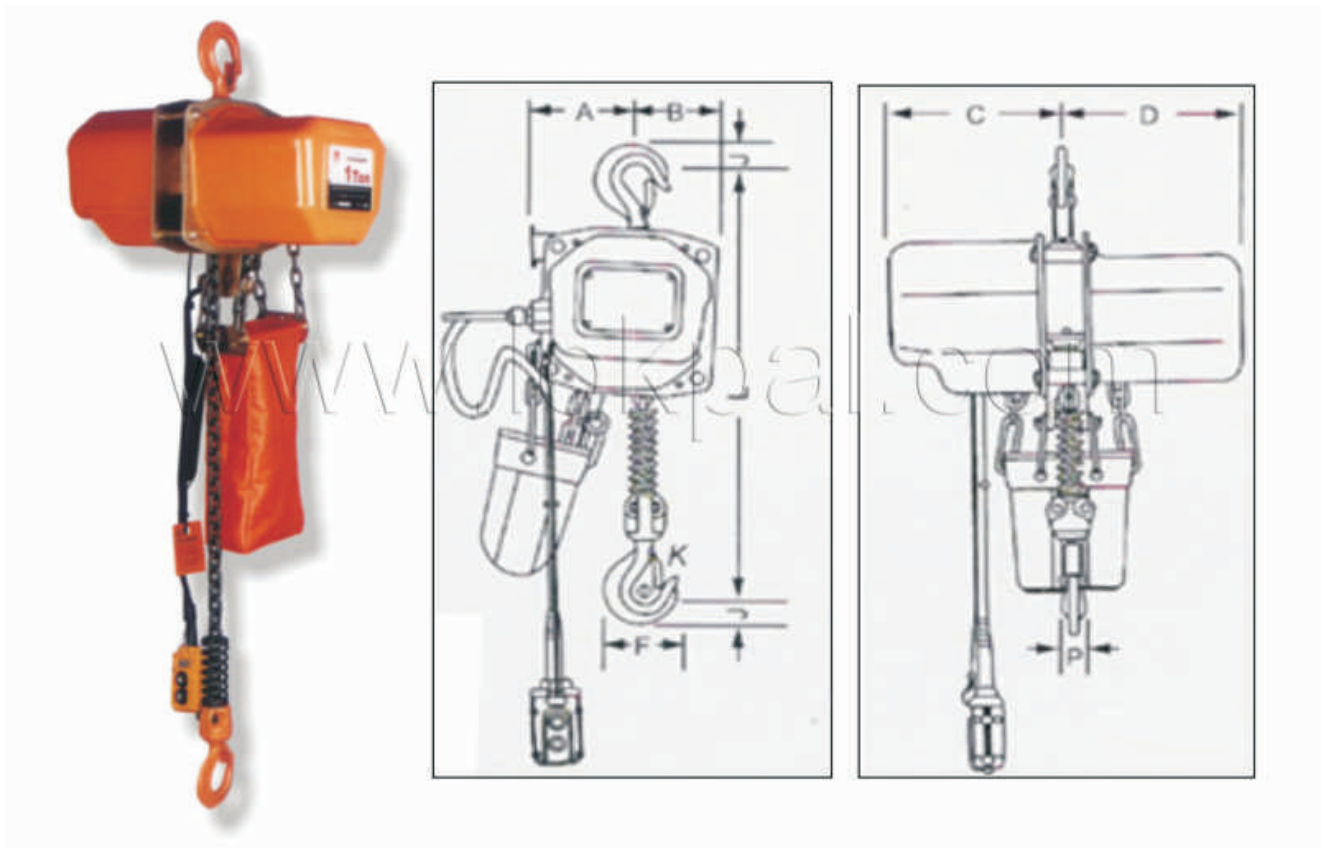

Features

Compact and high efficient motor-DC brake system without asbestos. Electricity consumption is less. Hoist body - Press steel structure, high strength body, light and compact design. High strength compact and beautiful plastic chain container provides excellent durability. Both the top and bottom hooks are made of high tensile alloy steel with special heat treatment. This ensures extra safety and prevent hook from breaking down. Limit switch devices fitted at both the top and bottom ends. Ensure automatic power cut off to prevent load chain from running out. Phase error relay. Specially designed current post. In case of false wire connection motor will not start.

Specifications :


Model	Capacity	Std. Lift	Running Test Load	Motor Power	No. of Column of Load Chain	Load Chain Diameter	Lifting Speed	Dimensions								
								A	B	C	D	K	F	J	P	L
	Ton	m	kg	kw	Nos.	mm	m/min.	mm	mm	mm	mm	mm	mm	mm	mm	Mm
HHXG-10	1.0	3.0	15	1.1	1	7.1	4.3	150	112	250	245	30	105	26	15	590

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

ELECTRIC WINCH

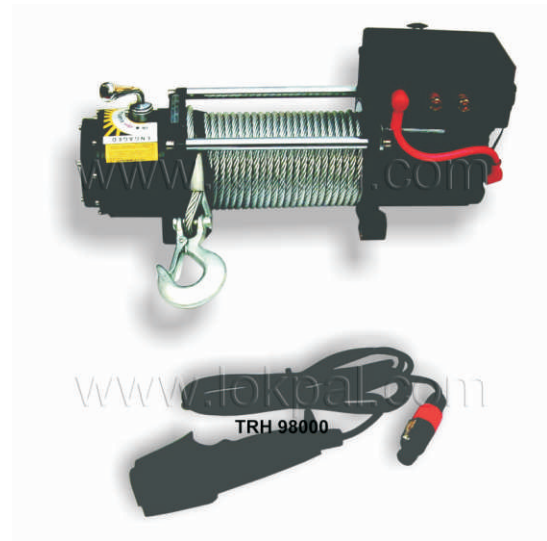


Specifications :

Model	Capacity	Motor	Braking	Cable	Recommended Battery	Battery Leads	Overall Size
TRH 9800	3500kg	DC 12V	Automatic in-the-drum	29m/8.0mm	650CCA	1.83m	520x160x218mm
Line Speed & Amp Draw-First Year							
	Line Pull	Line Speed	Motor Current				
	3626kg	1.3m/min	330amp				
Line Speed & Cable Capacity							
	Layer of Cable	Pull Per Layer	Cable Capacity				
	1	3626kg	5.0				

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

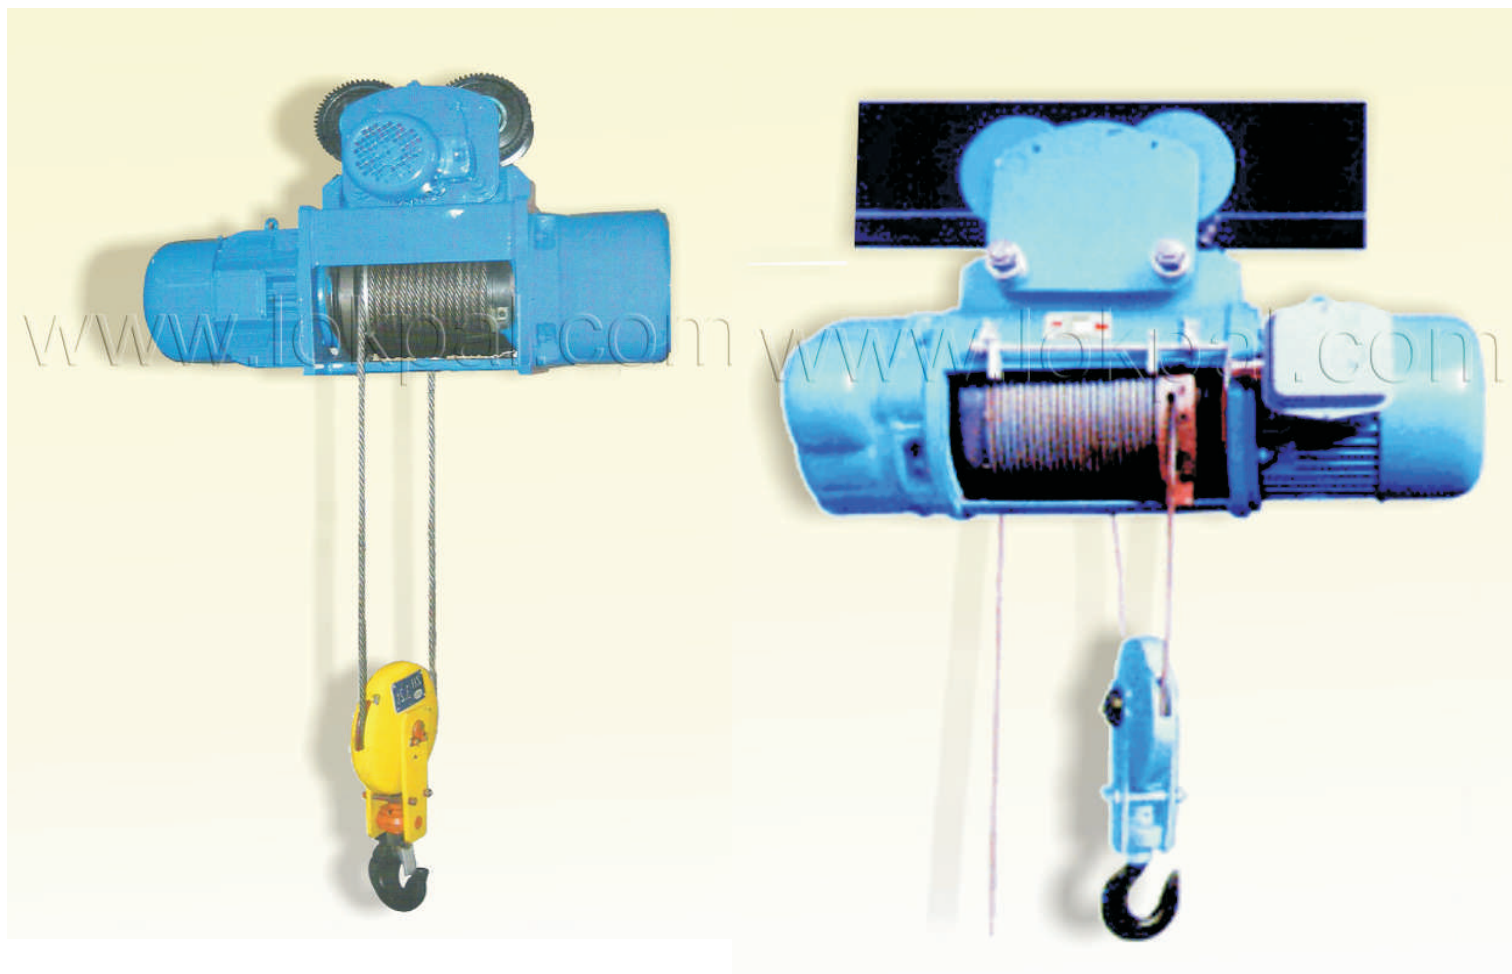

Features

Compact and high efficient electric motor. Electricity consumption is less. Hoist body. Press steel s structure high strength body, light and compact design. Both the top and bottom hooks are made of high tensile alloy steel with special heat treatment. This ensure extra safety and prevent hook from breaking down.

Specifications :

Model	Capacity	Lifting Height	Lifting Speed	Travel Speed	Wire Rope Dia.	Wire Rope Construction	Min. Radius of Beam	Lifting Motor 3 ph.	Traveling Motor 9 ph.
CD1	Tons	mtrs	mtr/min	mtr/min	nm		mtr	kw	kw
	0.5	9	8.0	20	5.1	6x19	1.5	0.8	0.2
	1	9	8.0	20	7.4	6x37	1.5	1.5	0.2
	2	9	8.0	20	11	6x37	2	3	0.2
	3	9	8.0	20	13	6x37	2	4.5	0.2
	5	9	8.0	20	14	6x37	2.5	7.5	0.5
	8	9	7.0	20	13	6x37	3	7.5	2x0.5
	10	9	7.0	20	14	6x37	3.5	13	2x0.5
	12	9	5.0	20	16	6x37	3.5	13	2x0.8

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com



Features

Gear Trolley with fine gears.
Holds Hand Chain Hoist with loads firmly.
Smooth Travel on I-Beams.

Specifications :



Model	Capacity Ton	I-Beam Width mm
SL-71 Series	1	64-140
	2	76-165
	3	76-203
	5	88-203

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

HAND CHAIN HOIST

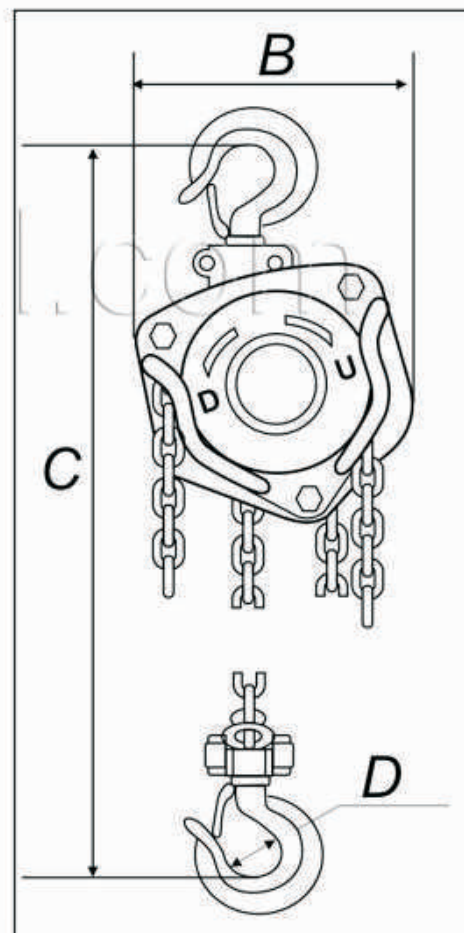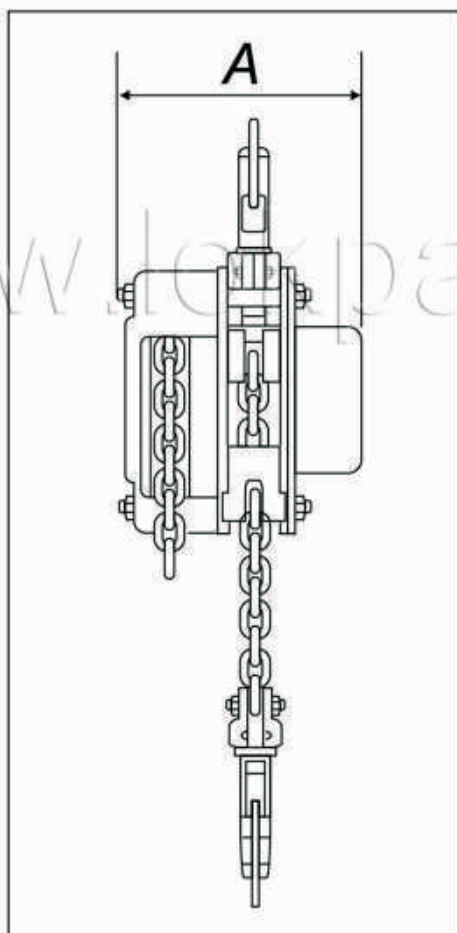

Specifications :

Model	Capacity	Std. Lift	Running Test Load	Load Chain Diameter	Strands of Load Chain	Dimensions			
						A	B	C	D
	Ton	m	Kn	mm	m/min.	mm	mm	mm	mm
HSZ-1A	1.0	2.5	15	6	1	140	158	350	40
HSZ-2A	2.0	3	30	8	1	161	187	450	50
HSZ-3A	3.0	3	45	8	2	161	210	550	58
HSZ-5A	5.0	3	75	10	2	186	253	650	64

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

HAND WINCH



WH 25



WH 20

Features

Light weight, with great strength.

Used in many applications as per your requirements.

Specifications :

Model	Weight	Cable	Gear Ratio
WH-20	2000lbs	5.1 mm x 10 mtr	4:1 / 8:1
WH-25	2500lbs	5.6 mm x 10 mtr	4:1 / 8:1

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com

MINI ELECTRIC HOIST



Specifications :

Model	Load Capacity kg	Input Power W	Lifting Height M	Lifting Speed M/MIN	Main Voltage
PA250					
Single Rope Wire	125	650	11	11	230V-50HZ
Double Rope Wire	250	650	5.5	5.5	203V-50HZ
PA500					
Single Rope Wire	250	1150	11	11	203V-50HZ
Double Rope Wire	500	1150	5.5	5.5	203V-50HZ

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com



Features

Light weight, with great strength.
Used in many applications as per your requirements.

Specifications :

Model	Capacity	Load Wheels mm	Wheel Size mm	Skate Size mm
AS-20	1	2pcs Nylon	82x100	115x270x110
AS-40	2	4pcs Nylon	82x100	230x270x110
AS-60	3	6pcs Nylon	82x100	345x270x110
AS-120	6	8pcs Nylon	115x60	400x345x145
SS-40	2	4pcs Nylon	82x100	250x310x110
SS-60	3	8pcs Nylon	82x100	560x395x110
SS-240	240	16pcs Nylon	115x60	1120x415x415

LOKPAL INDUSTRIES

A-6, Sector-3, Noida-201301, U.P., India | Tel.: +91-120-3065372 / 75

Website: www.lokpal.com | E-mail: info@lokpal.com